



# AX5 TriplePAR



## Optical

Colours  
RGBAW  
Total LED power  
45W  
Luminous Flux  
1080Lm\*  
Emittance (@2m)  
4800Lx\*  
CRI  
92  
Strobe  
0-25Hz  
Beam Angle  
13°  
Pixels  
1

## Construction



Housing  
Aluminium  
IP Rating  
IP65  
Relative humidity  
0-100%  
Operating Temperature  
0-40 °C  
32-104 °F  
Weight  
3.4kg  
Dimensions  
141 x 190 x 214 (mm)

## Accessories

 IR remote control  
ARC1  
 32° Flood filter  
AX5-FF(included)  
 17°x 46° Wallwash filter  
AX5-WWF (Included)  
 Spigot (3/8" & 1/4"-20 threads)  
 AX1-BLT  
 Charging case  
AX5-CHRS

## Electrical

Battery  
LG Chem Lithium-ion  
Battery Lifetime  
70% after 300 cycles  
LED Lifetime  
50.000 Hours  
Charging time (nominal)  
5 Hours  
Input Voltage  
90-264V 47-63Hz  
Input Current  
1.8A/115VAC ~ 1.0A/230VAC  
Inrush Current  
Cold start 30A/115VAC ~  
60A/230VAC

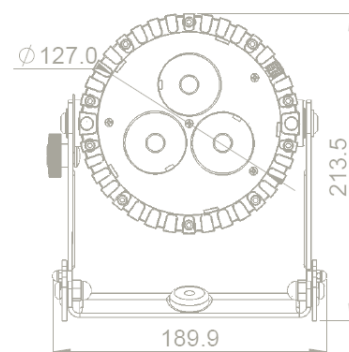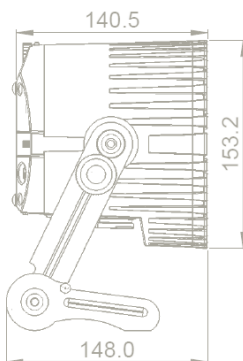

## Control

Wireless Modules  
865-870MHz  
902-928MHz  
2.4GHz  
Range  
300m | 330 Yards  
DMX  
Supports CRMX, W-DMX and XLR-DMX

